


#### PHASE I - BASE PAVING

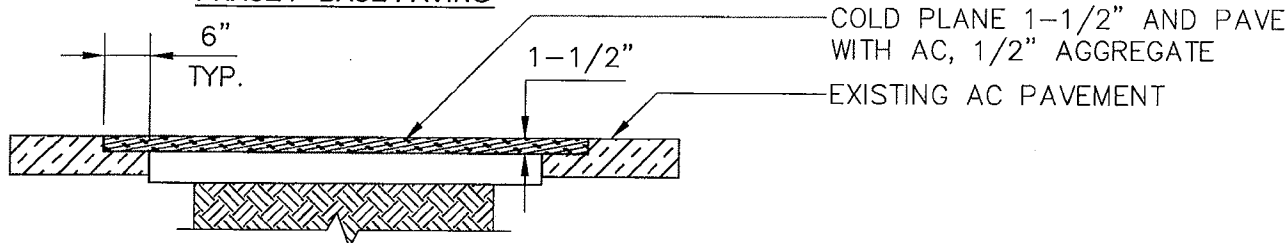

#### PHASE II - FINISH PAVING

DRAWING NOT TO SCALE

#### NOTES:

1. PAVEMENT MATERIAL AND SURFACING SHALL MATCH EXISTING.
2. ALL REMOVED SURFACE IMPROVEMENTS (CURBS, DIKES, SIDEWALKS, ETC.) SHALL BE REPLACED IN KIND.
3. ALL AREAS OF EXISTING AC LESS THAN 48" WIDE REMAINING AFTER TRENCHING SHALL BE COLD PLANED AND PAVED PER PHASE II FINISH PAVING.
4. PHASE I PAVEMENT THICKNESS SHALL EQUAL EXISTING PAVEMENT THICKNESS PLUS 1" (4" MINIMUM / 7" MAXIMUM).
5. WHEN GRAVEL OR ROCK IS USED WITHIN THE PIPE ZONE, THAT MATERIAL SHALL BE ENCAPSULATED IN A FILTER FABRIC ENVELOPE WITH  $W/2 \geq 12"$  MINIMUM OVERLAP. THIS REQUIREMENT APPLIES ONLY TO TRENCHES UNDER OR WITHIN 10' OF SURFACING.
6. PHASE II PAVING SHALL BE COMPLETED NOT EARLIER THAN 14 CALENDAR DAYS AND NOT LATER THAN 75 CALENDAR DAYS AFTER PHASE 1 PAVING.
7. FOR PCC PAVEMENT REFER TO RSD G25.

DRAWN BY: PME	CHECKED BY: JSM
RECOMMENDED BY: J. MOODY	
APPROVED BY: <i>Mohamed Fakhreddine</i>	
MOHAMAD FAKHREDDINE, COUNTY ENGINEER	
RCE # 44520	EXP. 3/31/10

### SAN DIEGO COUNTY DESIGN STANDARDS

### TRENCH RESURFACING TYPE-R

REVISION	APPROVED	DATE
	<i>mkt</i>	11/4/09
DRAWING NUMBER	DS-22	